


PRODUCT SPECIFICATIONS

RED GREEN EXIT SIGN W BATTERY



EXLEDRG120277 SKU# 1003821753 (White)
EXBLEDRG120277 SKU# 1005190239 (Black)

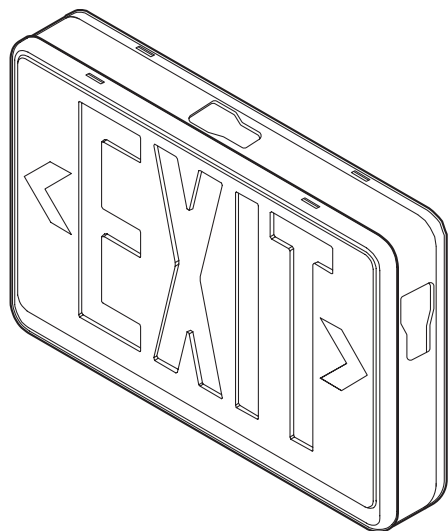

SPECIFICATIONS

Model Number	EXLEDRG120277/ EECBLEDRG120277
SKU	1003821753 / 1005190239
OSMID	306606873 / 312379018
Power	3.5 W
AC Voltage, Frequency	120-277V, 60 Hz
Color Temp (nom.)	N/A
Operation Temp	32°F ~ 104°F
CRI	N/A
Lumen Output (min.)	N/A
Max Mounting Height	N/A
Emergency Run Time	Min 90 min with included 4.8V Ni-Cad Batt
Efficacy	N/A

KEY FEATURES

- Red/Green switchable exit sign via on Board Switch. All components included to operate as red or green exit sign
- Single or Double faced
- Dual Voltage 120/277 VAC, 60 Hz
- Test switch/power indicator light
- Top, Side or Rear Mount
- 4.8V Ni-Cad Battery with Min 90 Min Run Time
- 5 Year Warranty

PACKAGING

Weight (±0.5 lb)	2.5 lbs
Size (L x W x H) (±0.1 in)	12.25 in x 1.75 in x 7.5 in
Box Dimensions LxWxH	12.5 in x 8.0 in x 2.38 in
Gross Weight	2.93 lbs
UPC	853711008106 / 853711008281

HOUSING CONSTRUCTION

- Injection molded, color stable, high impact UL 94-5VA rated polycarbonate
- Available in White or Black textured finish
- Snap-fit construction to enable under fast installation
- Molded-in wireways facilitate internal wire routing and connections
- Field adjustable snap-out/snap-in chevron directional indicators

INCLUDED IN BOX

- Exit Sign Face Plates (2)
- Solid Face Plate (1)
- Red Placard (2)
- Green Placard (2)
- Top/Side Mount Canopy (1)
- 4.8V Ni-Cad Back Up Battery (1)
- All necessary Mounting Hardware

RATINGS

- UL 924 Listed
- UL Damp Location Rated
- Life Safety NFPA 101
- CEC, T20, DOE Listed
- NEC/OSHA