


Internet#	Model#	Finish#
319949904	5011 C	Polished Chrome
319949909	5011 B	Brushed Nickel
319949915	5011 O	Matte Black
319949914	5011 P	Matte Gold

INSTALLATION AND CARE GUIDE

SINGLE-HANDLE BATHROOM FAUCET

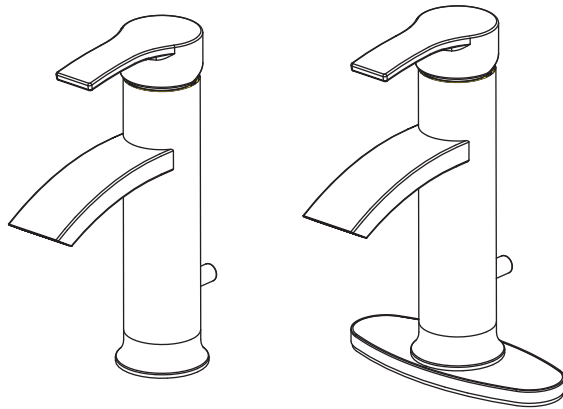

Questions, problems, missing parts? Before returning to the store,
call **Homedepot** Customer Service
8 a.m. - 7 p.m., EST, Monday - Friday

1-855-434-5224

HOMEDEPOT.COM

THANK YOU

We appreciate the trust and confidence you have placed in Homedepot through the purchase of this two handle lavatory faucet. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Homedepot !

Table of Contents

Warranty	2
Pre-Installation	2
Package Contents	3
Installation	4
Maintenance	7
Care and Cleaning	7
Service Parts	8

Warranty

LIFETIME LIMITED WARRANTY

The manufacturer warrants to the original purchaser that this faucet will be leak and drip free during normal domestic use. If this faucet should ever develop a leak, the manufacturer will provide the parts necessary to put the faucet back in good working condition. The manufacturer warrants to the original purchaser that the faucet will be free from defects in material and workmanship for one (1) year from date of purchase. A replacement for any defective part will be supplied free of charge for installation by the purchaser. Defects of other than authorized parts are not covered by this warranty. This warranty shall be effective from date of purchase as shown on the purchaser's receipt. Some states do not allow limitations on how long a warranty lasts, so the above limitation may not apply to you. This warranty is valid for the original purchaser only and excludes industrial, commercial, or business use of the product, product misuse, product damage due to installation error, whether performed by a contractor, service company, or yourself. Some states, provinces and nations do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that may vary from state to state, province to province, and nation to nation.

Contact the Customer Service Team at 1-800-855-434-5224 or visit www.HOMEDEPOT.com.

Pre-Installation

PLANNING INSTALLATION


Before you begin to install this product, ensure that all parts are present. Compare parts with the package contents list. If any part is missing or damaged, do not attempt to install the product. Contact customer service for replacement parts.

TOOLS REQUIRED



Pre-Installation (continued)

PACKAGE CONTENTS

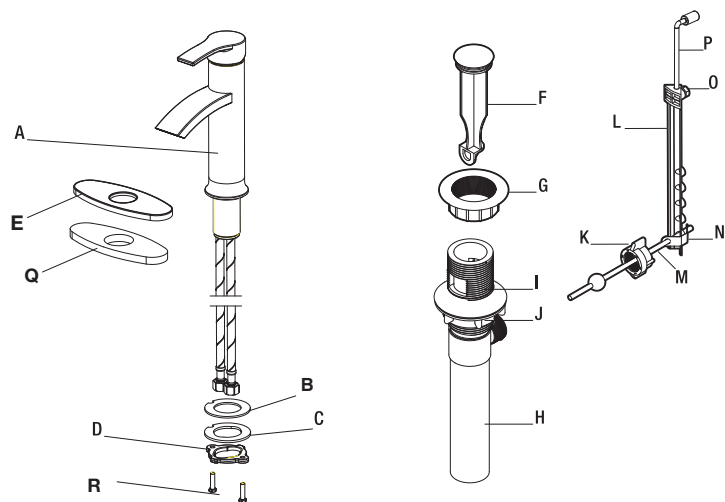

Part	Description	Quantity
A	Faucet	1
B	Rubber washer	1
C	Metal washer	1
D	Mounting Nut	1
E	Deck plate	1
F	Stopper	1
G	Flange	1
H	Pop-up body	1
I	Gasket	1

Part	Description	Quantity
J	Nut	1
K	Pivot nut	1
L	Lift rod strap	1
M	Horizontal rod	1
N	Clip	1
O	Screw	1
P	Lift rod	1
Q	Bottom Plate	1
R	Screw	2


Installation

1 Removing the old faucet




CAUTION: Always turn off the water supply before removing an existing faucet or replacing any part of the faucet. Open the faucet handle to relieve water pressure and ensure that the water is completely shut off.

- Shut off all water supply lines.
- Remove the old faucet and clean off the installation surface on the sink.

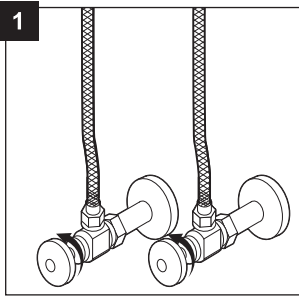

2 Installing the faucet


- 2a. **WITHOUT DECK PLATE:** Place the faucet (A) through the mounting holes in the sink until the faucet (A) sets on top of the sink.
- 2b. **WITH DECK PLATE:** Align the optional deck plate (E) and the optional bottom plate (Q) with the mounting hole in the sink. Place the faucet (A) through the deck plate (E) and mounting hole in the sink until the faucet (A) set on the top of the deck plate (E).
- 3. From underneath sink, secure the faucet assembly (A) with the rubber washer (B), metal washer (C), mounting nuts (D) and screw (R). Use the wrench to tighten the screw (R) on the mounting nuts (D).

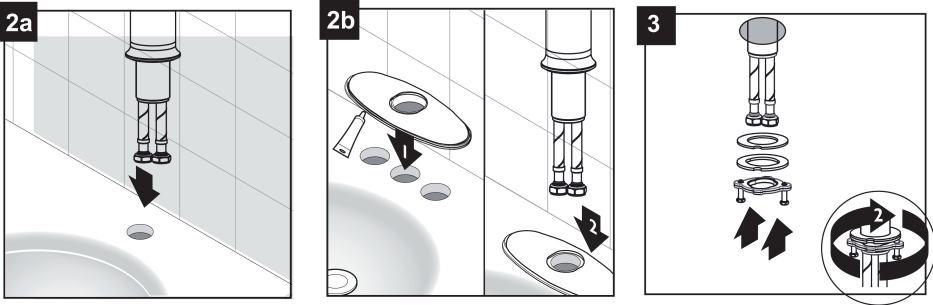

Installation (Continued)


3 Connecting the water supply lines

- Make connections to the water lines. Use ½ in. IPS faucet connections or use the supplied coupling nuts with 3/8 in. o.d. ball-nose risers.
- Use wrenches to tighten the connections. Do not overtighten.

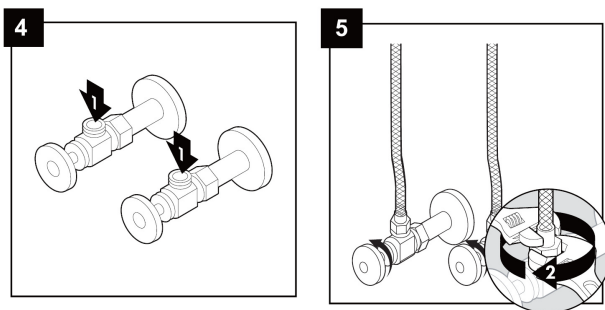

4 Preparing the pop-up body


- Remove the preassembled stopper (F) and flange (G) from the pop-up body (H).
- Screw the nut (J) all the way down the pop-up body (H).
- Push the gasket (I) down on top of the pop-up body (H) to rest on top of the nut (J).

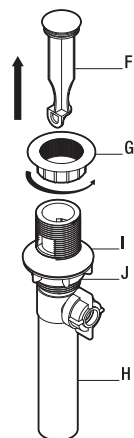

Installation (Continued)


5 Installing the pop-up body

- Apply silicone sealant to the underside of the flange (G).
- Apply sealant tape to the threads at the top of the pop-up body (H).
- Insert the pop-up body (H) into the sink.
- Screw the flange (G) onto the pop-up body (H). Ensure the pivot hole faces the back of the sink.
- Tighten the nut (J) and gasket (I). Do not overtighten. Clean off any excess sealant.
- Remove the pivot nut (K).

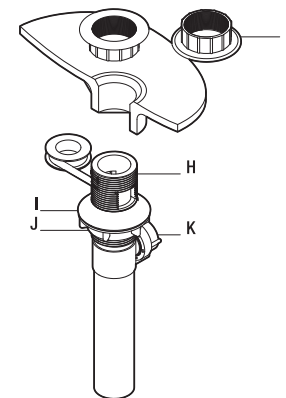

6 Installing the stopper


- Insert the stopper (F) into the sink. Remove the preassembled horizontal rod (M) and clip (N) from the lift rod strap (L).
- Install the horizontal rod (M) into the pop-up body (H) and through the hole of the stopper (F).
- Install the pivot nut (K) onto the horizontal rod (M) and hand tighten back onto the pop-up body (H).
- Re-attach the lift rod strap (L) to the horizontal rod (M) using the clip (N).

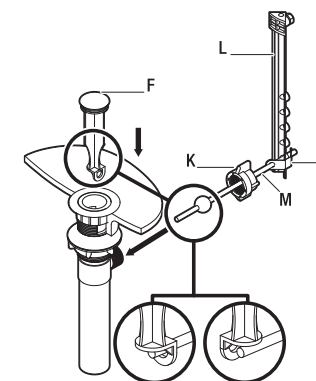

Installation (Continued)


7 Installing the lift rod

- Insert the lift rod (P) through faucet (A) and into the strap (L). Tighten the screw (O).

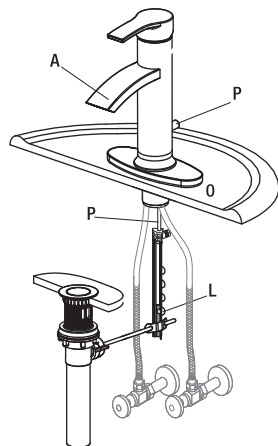

8 Checking for leaks

- Turn on the water supply.
- Turn the handles (B) and allow both hot and cold water to run for at least one minute each.
- While water is running, check for leaks.

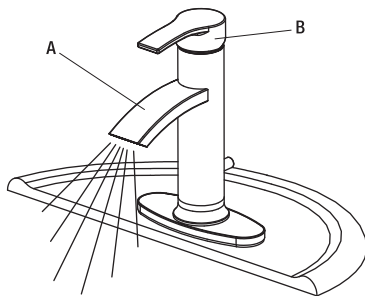


Maintenance

- If the faucet leaks from the spout, shut off the water supplies and replace the cartridge. Ensure that you install the cartridge correctly for proper handle rotation.

Care and Cleaning

- Preserve the finish of the faucet by applying a non-abrasive wax. Any cleaners should be rinsed off immediately.
- Do not use any harsh abrasives or cleaners.

Service Parts

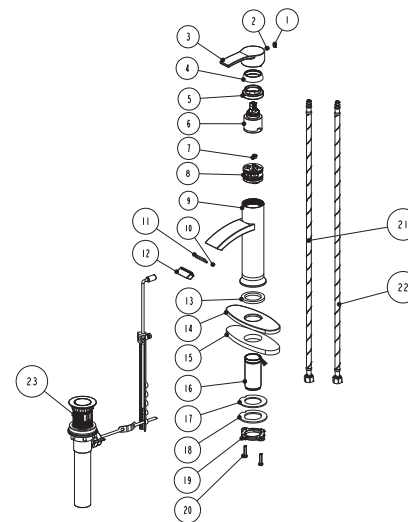

No.	Description	QTY	No.	Description	QTY
1	Index Button	1	13	Gasket	1
2	Screw	1	14	Deckplate	1
3	Handle	1	15	Bottom Plate	1
4	Dome Nut	1	16	Shank	1
5	Cartridge Cap	1	17	Rubber washer	1
6	Cartridge	1	18	Metal washer	1
7	Water-saving slice	1	19	Mounting Nut	1
8	Inner Body	1	20	Screw	2
9	Faucet Body	1	21	Inlet Hose (Red)	1
10	Screw	1	22	Inlet Hose (Cold)	1
11	Sealing Strip	1	23	Pop-up	1
12	Aerator	1			