




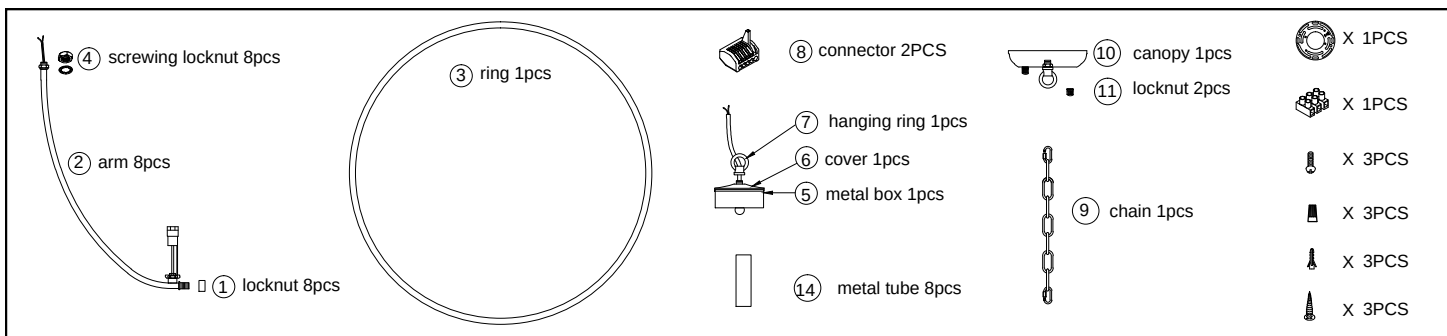


A: It is a normal situation if the arms 2 not fixed at this step, can be fastened it after step 2.

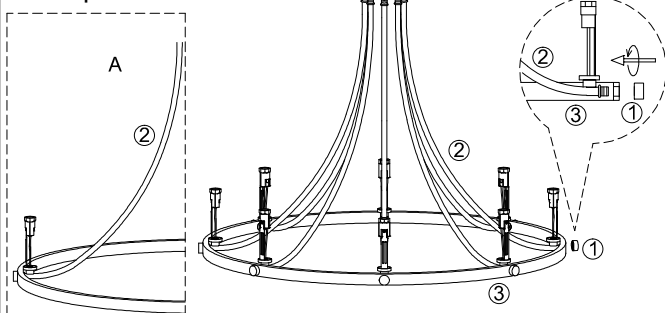


1. Install the arms 2 on the ring 3 with locknuts 1.
(It is a normal situation if the arms not fixed in this step, can be fastened it after step 2.)

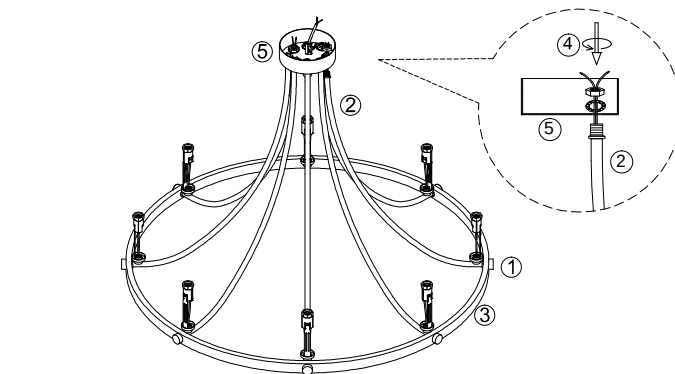


2. Let the wires of the arm 2 go through the metal box 5, fasten the arms on the box 5 with screwing locknuts 4, fasten the arm 2 to the ring 3 by turning lock nut 1.

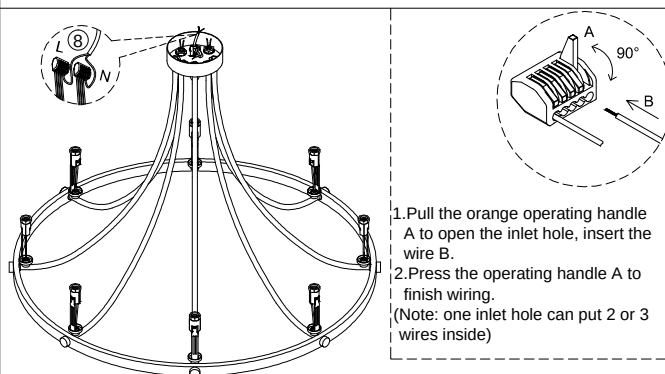


3. Connect all the wires by parallel with connectors 8 (all live line-L use one connector, and neutral Line-N use another connector).

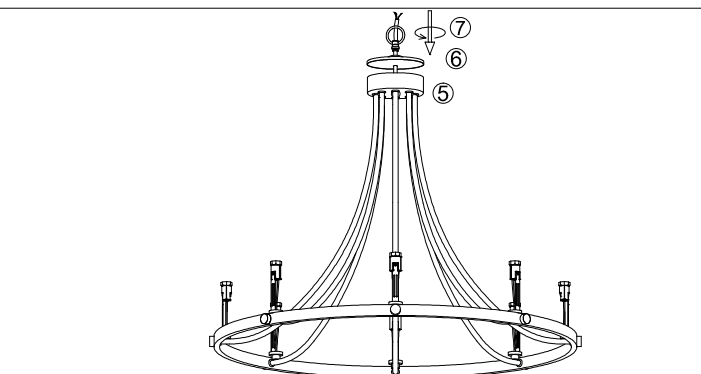

4. Let the main wire go through the cover 6 and the hanging ring 7, turn the ring 7 to close the cover 6 with box 5

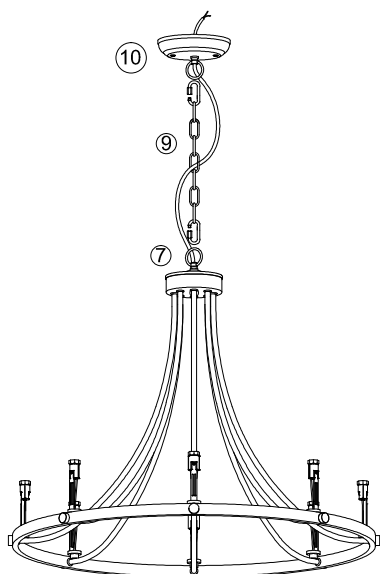

5. Connect the light fixture 7 and canopy 10 with chain 9.

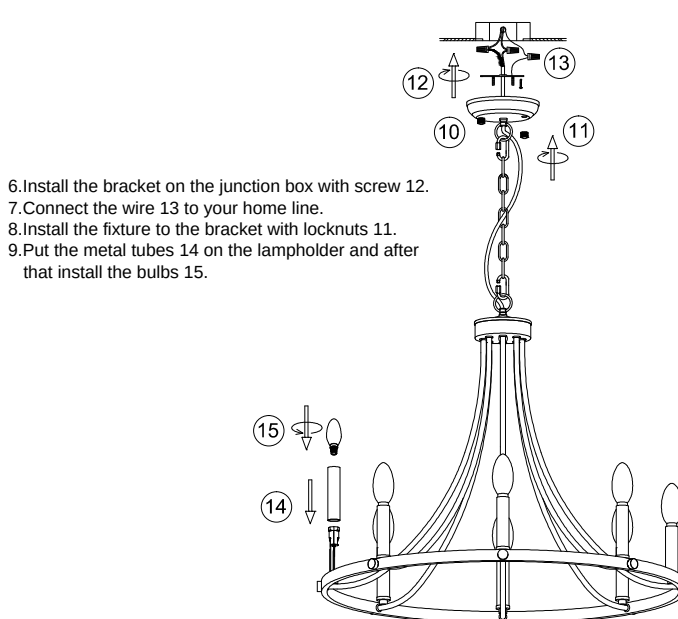

6. Install the bracket on the junction box with screw 12.
7. Connect the wire 13 to your home line.
8. Install the fixture to the bracket with locknuts 11.
9. Put the metal tubes 14 on the lampholder and after that install the bulbs 15.

D0086-8

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !