



Components® | K-T23889

Wall-mount bathroom sink faucet spout with Row design, 1.2 gpm

Features

- Stationary spout
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Drain sold separately
- Coordinates with other products in the Components collection



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

	SN	Vibrant Polished Nickel
	AF	Vibrant French Gold
	BV	Vibrant Brushed Bronze
	BL	Matte Black
	2MB	Vibrant Brushed Moderne Brass
	TT	Vibrant Titanium
	BGP	Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-22-2026 15:3 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 10-1/4" (260 mm)

Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)

Valves

Included Valve: Ceramic disc

Material

- Brass
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories


K-23726 Drain treatment
K-78383 Vertical toilet paper holder
K-78384 Covered double toilet paper holder
K-23723 Faucet cleaner
K-78372 18" towel bar
K-78379 Double towel arm
K-78373 24" towel bar
K-78375 Double towel bar
K-78377 Towel arm
K-78378 Robe hook
K-78382 Pivoting toilet paper holder

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



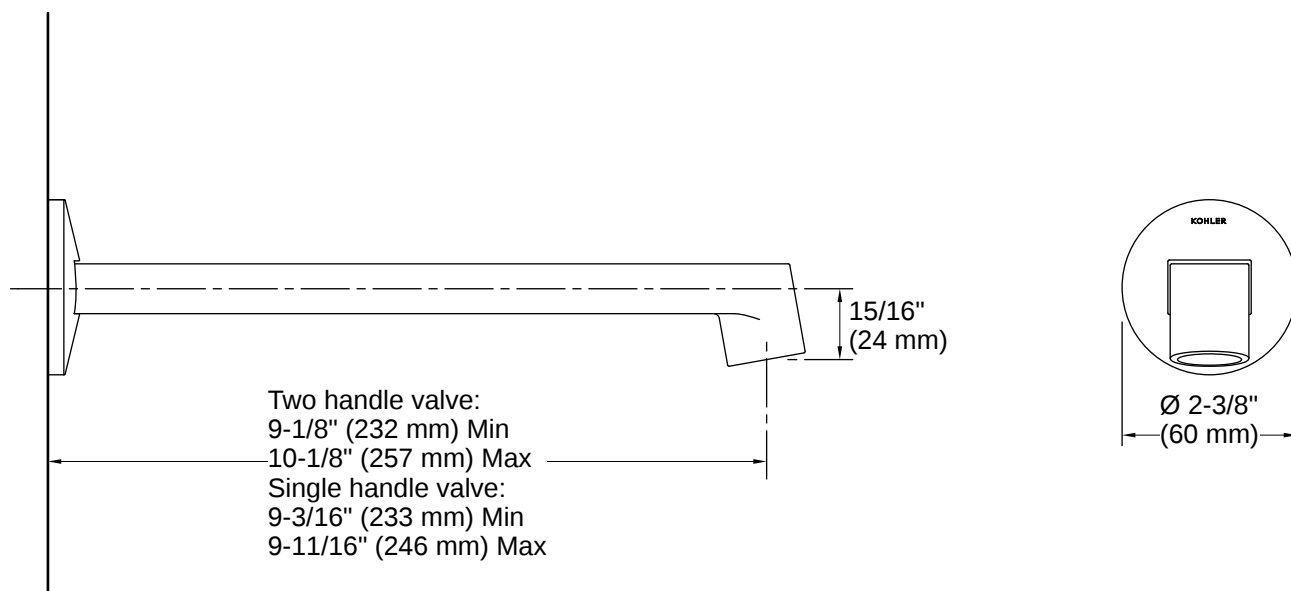

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

