KOHLER®

MasterShower® | K-2977-K

3/4" volume control valve

Features

- Provides On/Off operation with precise control of water volume and intensity
- Single-handle operation
- 28.0 gpm flow rate at 45 psi (3.1 bar)
- 3/4" female NPT connections
- Ideal for use with Kohler thermostatic mixing valves
- Quarter-turn operation with ceramic disc cartridge
- Requires volume control valve trim (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:0 - US-CA

THE BOLD LOOK OF KOHLER®

Codes/Standards

ASME A112.18.1/CSA B125.1

Valves

Included Valves:	Thermostatic, Volume Control

Shower Valve

Flow Rate Maximum @ 45 psi:	28 gpm (106 l/min)
Pressure:	45 psi (3.1 bar)
Maximum Static Pressure:	125 psi (8.6 bar)

Material

- Forged dezincification-resistant brass body provides long term reliability and resistance to aggressive water conditions


Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:0 - US-CA

THE BOLD LOOK OF KOHLER.

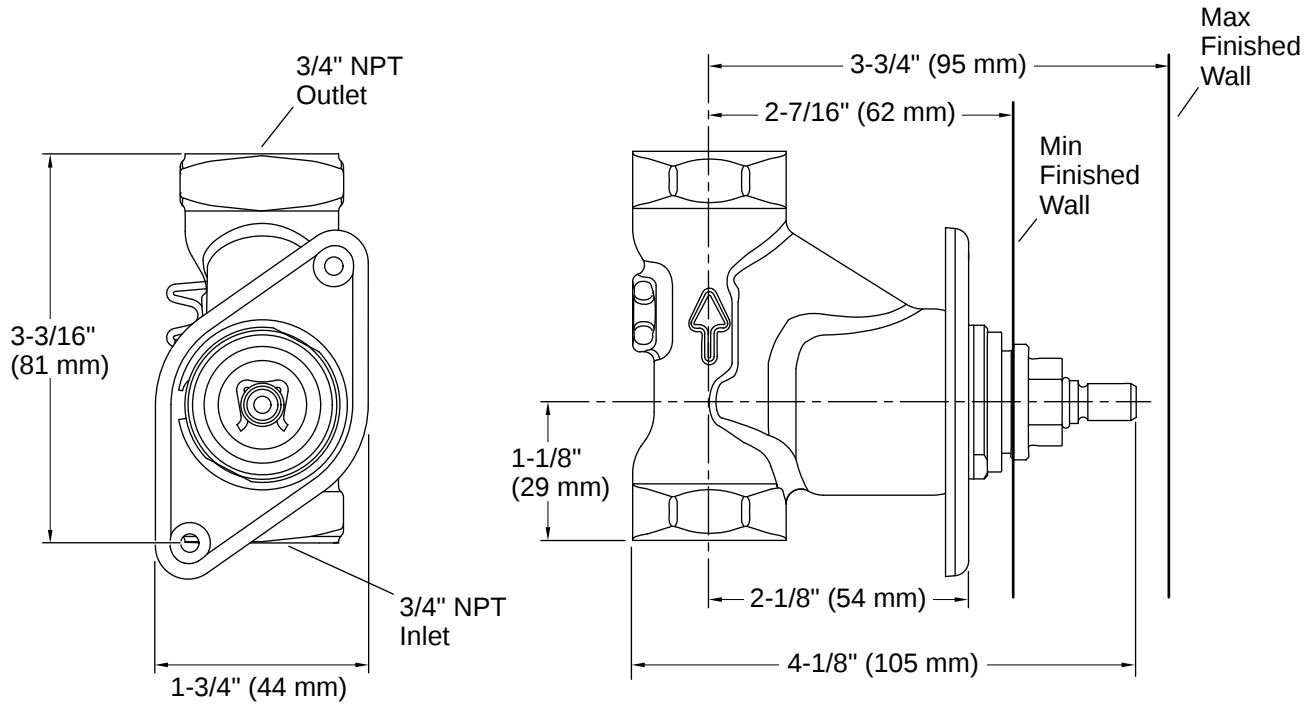

Installation Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 0 gal/min (0 l/min) or higher.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:0 - US-CA

THE BOLD LOOK OF KOHLER.