

INSTALLATION INSTRUCTION



CONCEALED SHOWER

IAPMO RESEARCH AND TESTING, INC.	
CERTIFICATE OF LISTING	
Issued To: QIANG YONG HOSE FACTORY	Effective Date: April 2021
File Number: N-12008	
Product: Drinking Water System Components - Health Effects	Valid After: April 2025
This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at ipm-appraising.com	
Identification: Each product shall be permanently and legibly marked with the manufacturer's name or trademark. The product may also be marked with the standard designation "NSF/IANS/ICAN 61".	
Characteristics: Materials or products that come into contact with drinking water and/or drinking water treatment chemicals. Products and materials may include process media, protective materials, joining and sealing materials, pipes and related products, mechanical devices used with treatment/transmission/distribution systems, and mechanical plumbing devices. To be installed in accordance with the manufacturer's instruction. Lead free requirements are addressed under a separate certificate of listing.	
Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.	

Page 2 of 4

IAPMO R&T Research and Testing, Inc.

5001 E. Philadelphia Street, Ontario, CA 91764 • 951• 2616 • Fax (909) 472-4200 • Fax (909) 472-4244 • www.iapmort.org

IAPMO R&T Product Listing

This IAPMO R&T listing is current as of 8/22/2020

C ®

Product Plumbing Fixture Fittings

File No. B320

BUEHLER INC.,
11 MONROVIE HEIGHTS
WATSONVILLE, CA 95070

Detailed Description This fitting component shall permit listed assemblies to identify the manufacturer. This marking shall be the same size, trademark, or other mark known to identify the manufacturer. The product shall have all other markings required by the standards. The marking shall be placed where it can be readily seen after installation to complete the product or packaging shall also bear the UPDM certification mark.

Characteristics This plumbing fixture fitting component to be installed in accordance with the Manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code. Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been based solely upon the laboratory's compliance to the applicable requirements of ASME A112.19.4.

Products may be compliant with the following code(s)

- Uniform Plumbing Code (UPC)
- National Fire Protection Association (NFPA)
- International Plumbing Code (IPC)

Products may be compliant with the following standard:

- ASME A112.19.4-SHOWER DRAIN-1/4"

MODELS:

Chased, Chasespot, Caracanth, HUBBARD, JUNE, Reelator®, Spring Fish®, Ten Thousand, Twisted, Chromatic Supreme

Auxiliary Part Number Shown In Model List: N/A

(A) Assembly Type

- 1 Auxiliary
- 3 Plastic Knifc Anchor
- F Clinks

(B) Product Type

- 1 Iselator
- 2 Iselator JV
- 4 Clastic
- 5 Core
- 6 Spring Fit
- 7 Spring Pin JV
- 8 Pelvic Rest
- 9 Iselator JV (Isolation)
- 10 Iselator Ten Thousand
- 11 Chromatic
- 12 Caracanth

(D) Flow Rate

IAPMO RESEARCH AND TESTING, INC.

5001 E. Philadelphia Street, Ontario, CA 91761 • Phone (909) 472-4100 • Fax (909) 472-4244 • www.iapmo.org



CERTIFICATE OF LISTING

USFMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the Characteristics below and is not to be construed as any recommendation, endorsement or guarantee by USFMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

Issued To:

QIANG YING HOSE FACTORY


BLOCK 1, NO. 225 JIAOXING NORTH ROAD, SHURUO TOWN, KAPING, GUANGDONG, CHINA

Product:

Drinking Water System Components - Health Effects

Products are in compliance with the following standard(s)
NSF/ANSI/CAN 61-2018

File Number: N-12908
Effective Date: April 2021
Valid After: April 2026*



Susan O'Connell
Customer Product Certification Specialist

Chief Technical Service Officer

*This listing period is an indication of current listing. To re-verify listing status, visit the USFMO R&T Product Listing Directory at pds.iapmo.org

This listing period is based on the date of the fourth evaluation of the product and may change in the future. In the event of material manufacturing changes, sampling or design without being approved or approval of the Product Certification Committee, or any violation of acceptance with applicable rules and standards or of inferior performance may be deemed sufficient cause for revocation of this listing. Production of an evaluation in this form for advertising purposes may be made only by specific permission of USFMO Research and Testing, Inc. Any alteration of this certificate should be grounds for revocation of the listing. This document shall be reproduced in its entirety.

Page 1 of 4

IAPMO RESEARCH AND TESTING, INC.

CERTIFICATE OF LISTING

Issued To: QINANG YING HOSE FACTORY

Effective Date: April 2021

NSF/ANSI/CAN 6.1

File Number: N-12908

Product: Drinking Water System Components - Health Effects

Valid After: April 2026

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at prod.usp.org

Models

Note: The following models are in compliance with NSF/ANSI/CAN 6.1, Section 9.

Flexible Braided Hose

Legend Format	Description
PEX-QY-BuB-C-***	
B	Type of Nut/Connection Fitting
-F3/8	
-F1/2	
-F3/4	
-F1S*1	
-M3/8	
-M1/2	
-M3/4	
-M1"	
-M1 1/2"	
-M1 1/4"	
-M1 3/4"	
-1/2"DNBM	
-DN150/160	
-DN150 Quick Connect	
-gush ft	
-gush ft-three way	
C	Type of outer tube
-stainless steel braided	
-nylon braided	
***	Length (in cm)
20cm - 200cm	

Page 3 of 4


[illegible]

BEFORE INSTALLATION

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.




Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.




1. Please read the manual firstly before installation;
2. Please check the condition of all the parts, and the installation tools are not included, please prepare it by yourself;
3. User manual includes matters needing attention during installation, please keep it properly;
4. The size chart in the manual is for reference only, please refer to the actual product that you receive.


Recommend Tools :




PTFE Tape



Hex Key




Slotted Screwdriver



Phillips Screwdriver

INSTALLATION DIMENSION

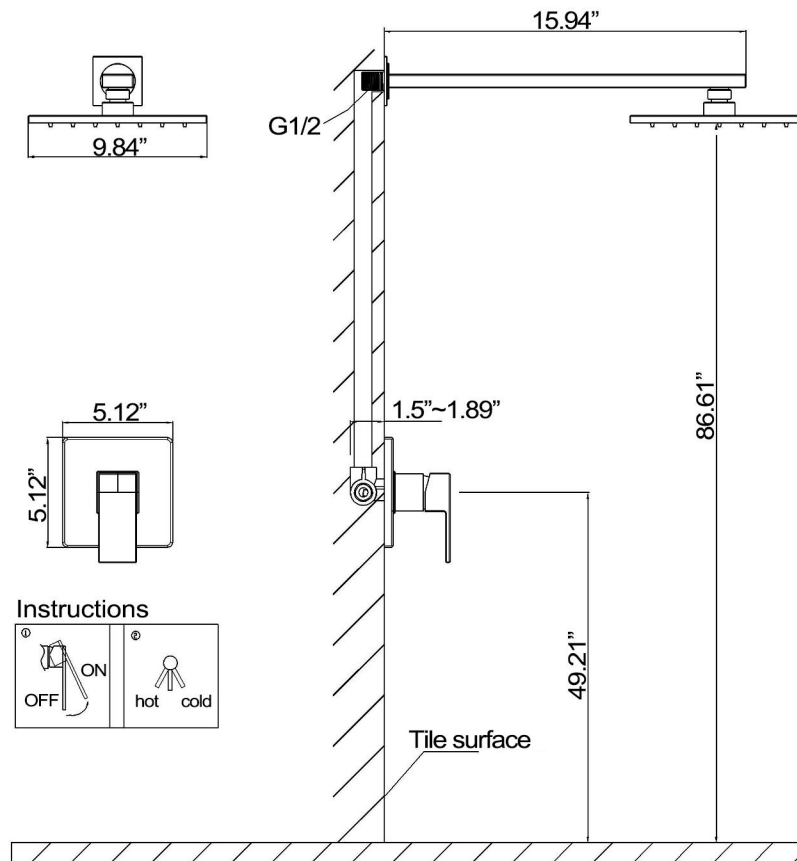



The picture is for reference only, you can install it according to your own requirements.

INSTALLATION STEPS


- 1.The sundries at the connection area must be cleared before installation to avoid blockage or leakage;
- 2.Connect the inlet pipe correctly as shown in the figure;
- 3.The maximum temperature of hot water is not higher than 80 °C (176°F);
- 4.Please contact seller for consultation if you need to install in other method.

①

Mark the location of screw holes on the wall, drill holes and install the water intake body

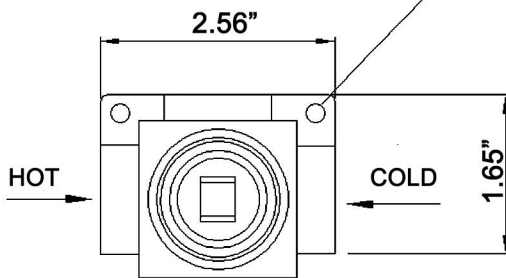


In the process of burying the wall, please do not remove the protective cover and avoid touching the copper sleeve.

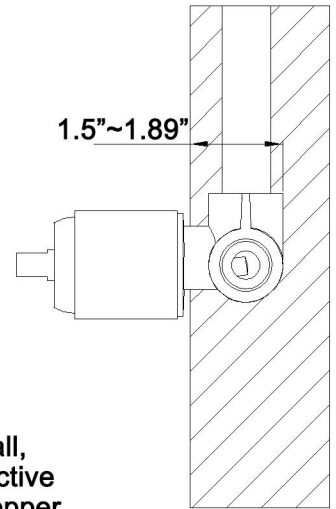

②Please install other parts in the order as shown in the figure below when the valve mounted to the wall:

- 1.Remove the lid of the Embedded Box;
- 2.Place the trim plate;
- 3.Mount the handles.

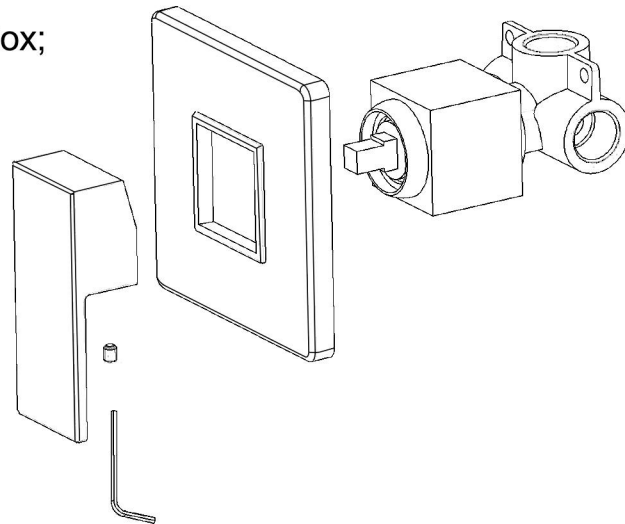

CLEANING CARE

In order to keep the appearance of faucet clean,bright and good performance, please take care of the faucet as follows;

- 1.Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner,or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.



