Assembly Instruction (LL802, LL803 family)

parts enclosed:

Item	Description	Q'ty
A	Mounting plate	1
B	Backplate screw	3
C	Base screw	3
D	Fixture body	1
E	Shade	2 or 3
F	Socket Ring	2 or 3
G	Bulb (not include)	0









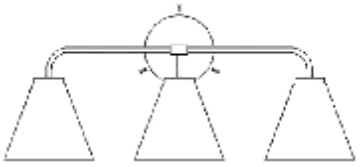

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage .
3. The picture is just for reference and some parts will maybe different from the actuals

warnings:

1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully unpack and identify all parts referring to the illustration for parts identification.
2. Turn off power at the outlet box where the fixture will be installed.
3. Insert the Back plate Screws into the Mounting Plate (A) and attach the Mounting Plate (A) to outlet box using the Mounting Screws, tighten with a screwdriver. Ensure the side of the Mounting Plate (A) marked “GND” is facing out.
4. While holding the fixture body (D), connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a Wire Connector. Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a Wire Connector. DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
5. If the outlet box has ground wire (green or bare copper), connect the green ground wire from the fixture to it using a Wire Connector . If the outlet box does not have a ground wire, connect the green ground wire outlet box from the fixture to the green ground screw provided on the Mounting Plate (A).
6. Tuck these wire connections neatly into the outlet box, place the Backplate of the fixture body (D) over the Mounting Plate (A) and align the holes on the Backplate of the fixture body (D) with the Backplate Screws (C), secure the fixturebody (D) is secured to the wall.
7. Place the Shades (E) over the sockets and secure the Shades (E) in place using the Socket Rings (F).
8. Install the proper light bulbs (G) (not included) in accordance with the fixture’s specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING)
9. Installation is complete. Turn on power at the outlet box and test the lighting of the fixture.

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.