


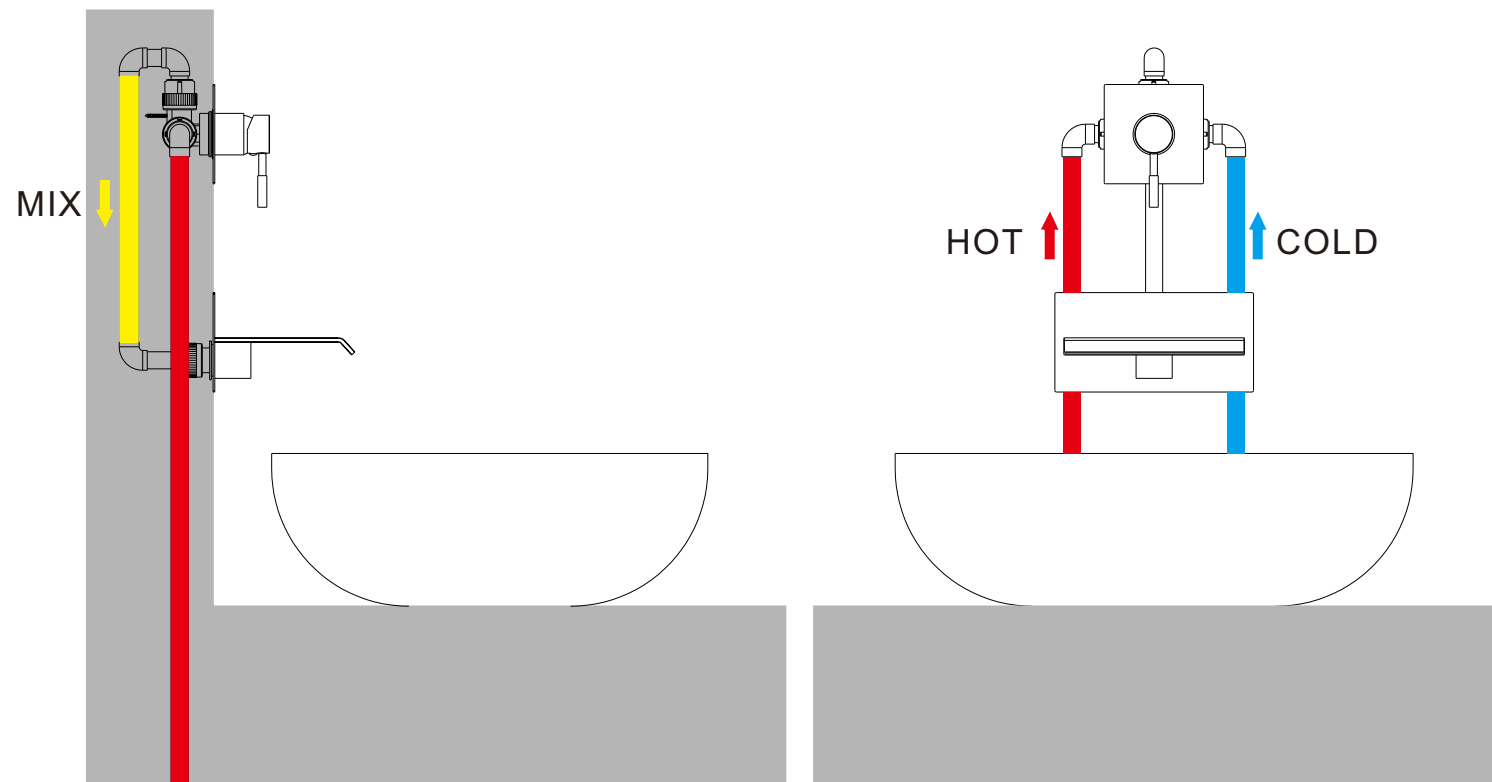
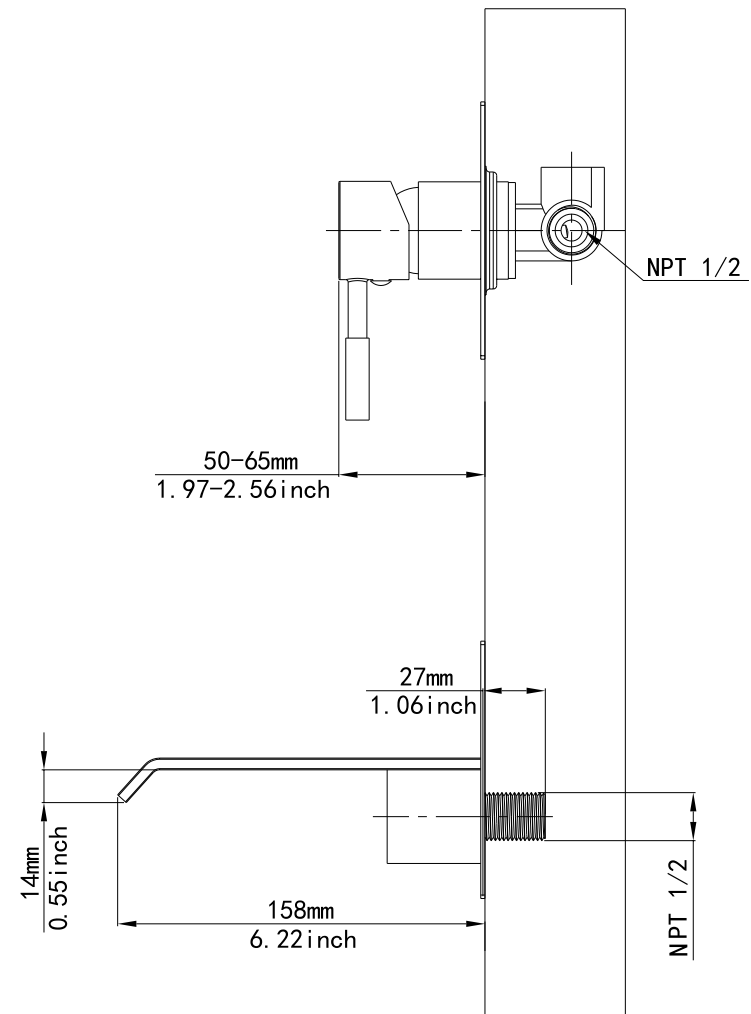


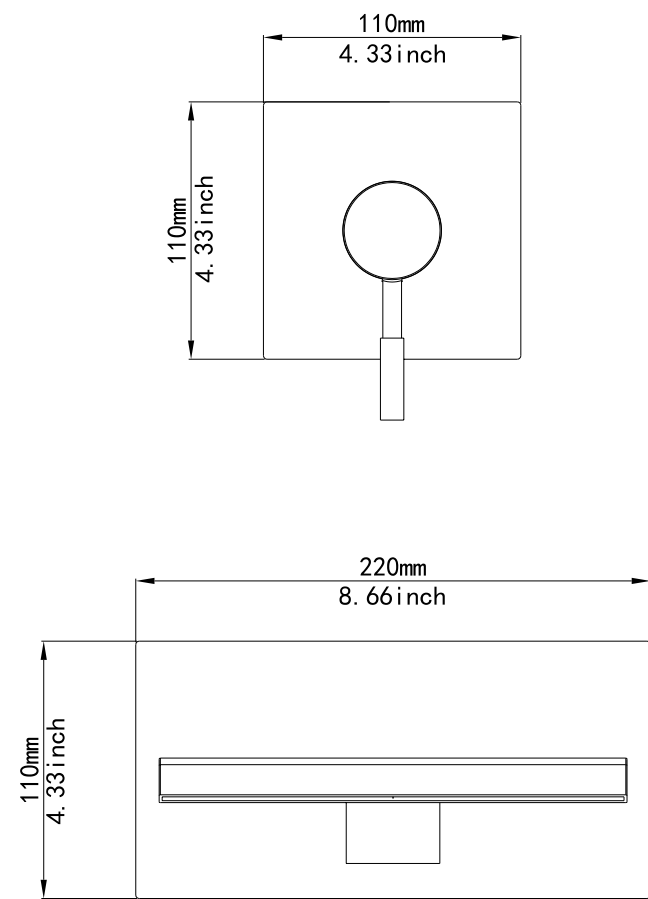


1. Connect the faceplate and spout with screws.

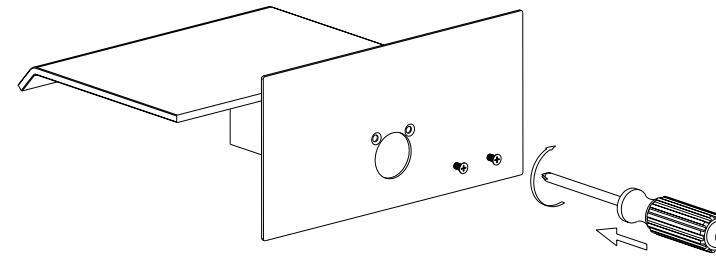


2. Punch holes in the wall.

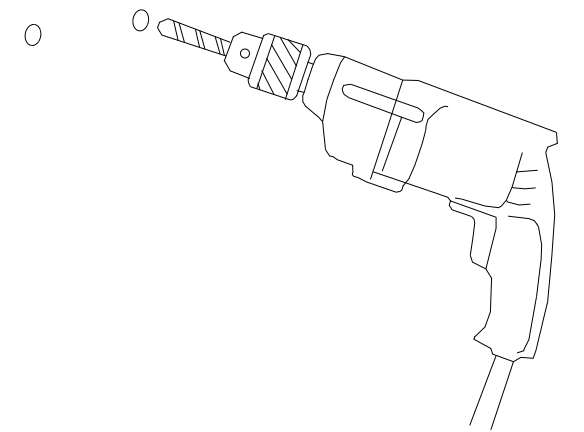


3. Knock the plastic expansion sleeve into the wall.

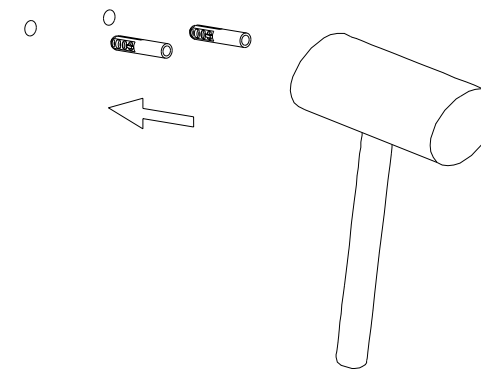


4. Lock the control body to wall with screws.

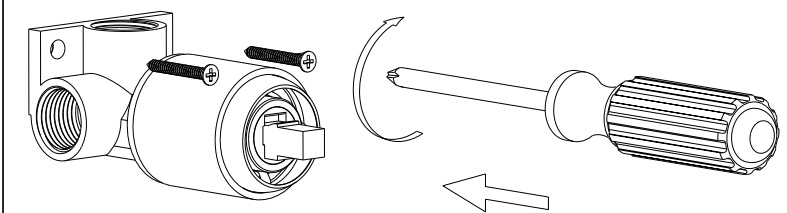


5. Connect the faceplate to main body.

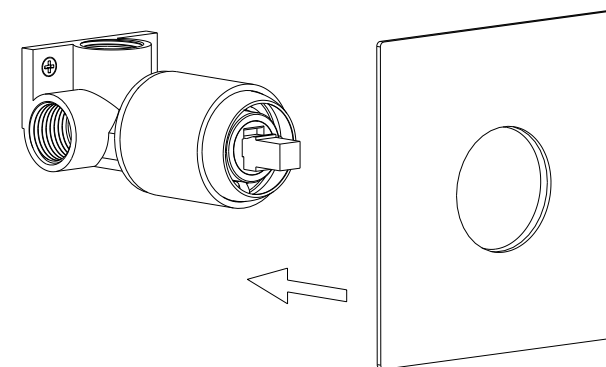

6. Install the handle.

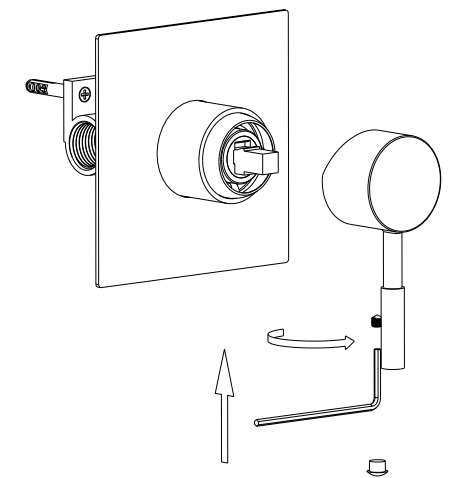

7. Wrap the water outlet joint with raw material belt, tighten with a wrench.

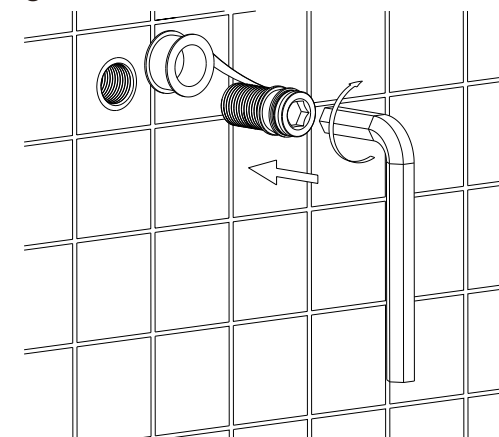

8. Fix the spout body finished in step 1 to wall.

