MasterShower® | K-2976-KS

XVII 3/4'' thermostatic valve with integral volume control and stops

Features

- MasterShower® thermostatic valve features an innovative shuttle design that delivers precise, consistent temperature control and a generous flow rate
- Thermostatic valve allows bather to set and maintain precise temperature
- Factory-calibrated comfort setting at 104°F
- High-temperature safety stop ensures water temperature stays below 120°F
- 17.2 gpm (gallons per minute) flow rate through bottom port and 14.9 gpm flow rate through top port
- ¾'' inlet
- Requires stacked valve trim (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 4:28 - US-CA

Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16

Valves

Included Valves:	Thermostatic, Volume Control

Shower Valve

Flow Rate Maximum @ 45 psi:	17.2 gpm (65.1 l/min)
Pressure:	45 psi (3.1 bar)
Maximum Static Pressure:	125 psi (8.6 bar)

Material

- Brass


Warranty


See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 4:28 - US-CA

THE BOLD LOOK OF KOHLER®

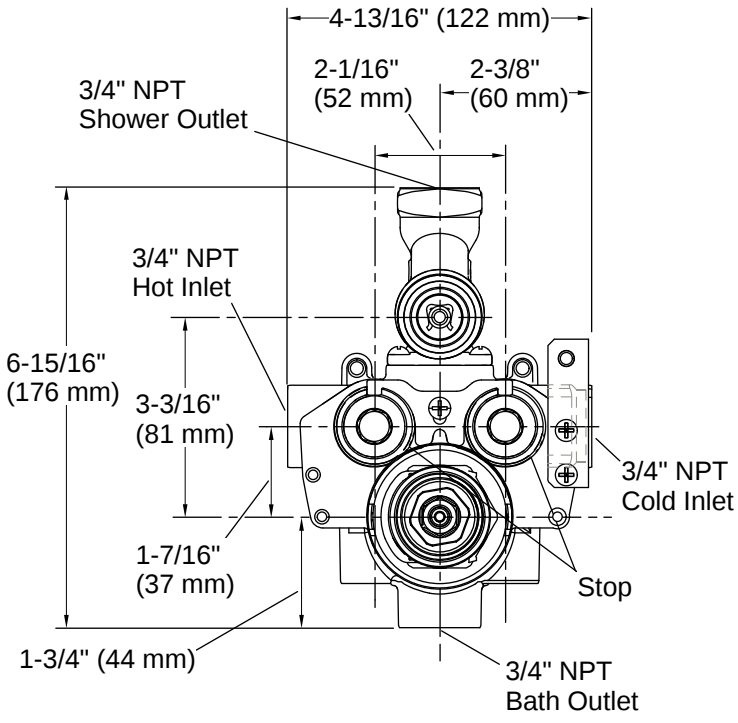

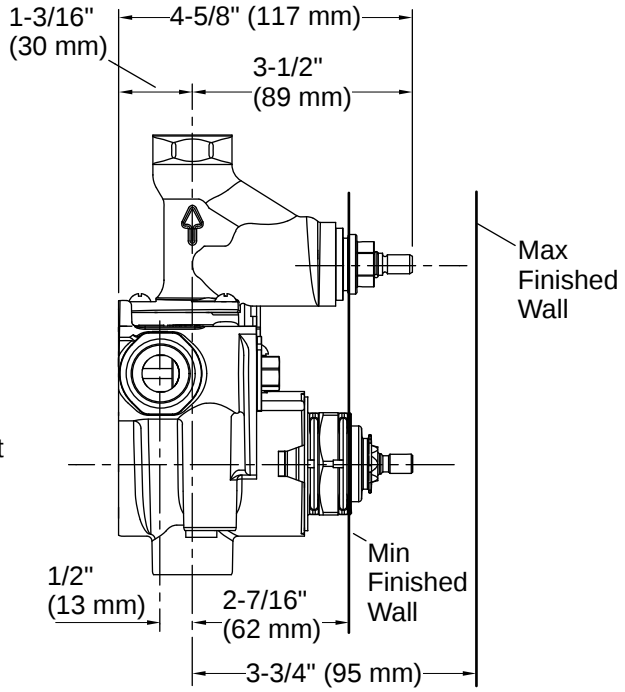

Installation

- Patented K-joint installation technology ensures consistent trim appearance, regardless of variability in valve rough-in (included with trim)

Installation Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 0 gal/min (0 l/min) or higher.
The K-2976-KS thermostatic mixer valve includes one volume control for shower-only installations. For bath and shower installations, an additional K-2974-K or K-2977-K volume control valve is required for the bath outlet.
An NPT plug must be installed in any unused outlet.
The lower port of the thermostatic mixer is intended for use with a bath spout only. If a bath spout is not used with this product, the lower port must be plugged.
For installations with a diverter spout, a K-9663 twin ell is required between the valve and the spout. A plug must be installed in the lower port of the valve and the supply to the K-9663 twin ell should run from the top port.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 4:28 - US-CA

THE BOLD LOOK OF KOHLER