

ONEGRIP


Smartphone Auto Mount



tzumi®



PRODUCT OVERVIEW & FUNCTIONS

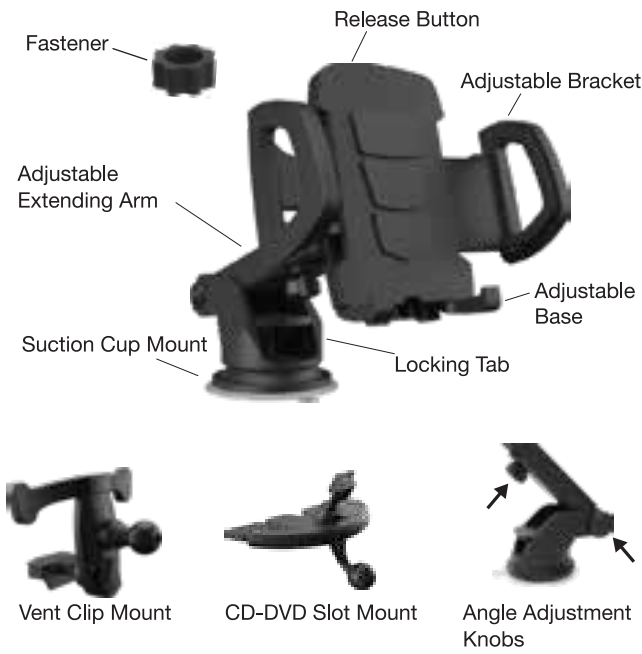


PACKAGE CONTENTS:

- Suction Cup Mount
- CD-DVD Slot Mount
- Vent Clip Mount
- Adjustable Smartphone Bracket Holder

INSTRUCTIONS

1. Attach the buckle on the back of the bracket holster by sliding the pieces in until they are secured tightly.
2. Choose a mount. Insert the fastener into the plastic ball joint on your chosen mount, then secure the mount into the back of the bracket holder.
3. Install the chosen mount in your vehicle.
4. Press the release button on the back of the bracket holder to extend the bracket arms. Insert your phone.
5. Squeeze your fingers tightly around the bracket arms to secure your phone. You can also pull the base arms out for extra support.
6. To release your phone, press the release button on the back of the bracket holder.

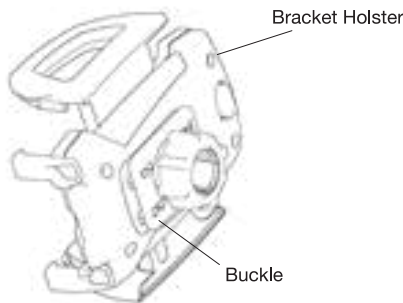

USING THE ADJUSTABLE EXTENDING ARM


1. Choose an ideal viewing angle to apply your suction cup mount. Apply to a clean surface such as your dashboard, windshield or any flat surface. Lock at Position 1 for smooth surfaces. Lock at Position 2 for textured surfaces. Pull the locking tab to create a tight seal.



2. Adjust the adjustable extending arm as necessary. When fully extended, the arm will provide about 2 additional inches of visibility. Attempt to clean the suction cup with a damp cloth if it does not appear secure or will not stick to a flat surface properly.
3. Attempt to clean the suction cup with a damp cloth if it does not appear secure or will not stick to a flat surface properly. Repeat steps 1-2.

INSTALLING THE VENT CLIP MOUNT

1. Put the hook accessory into the inner groove of the body of the vent clip mount and push it upwards.
2. Attach the smartphone bracket holder to the vent mount by securing it to the ball joint.
3. Pull the clip spring back and slide the hook into the vent*. Release to secure its position.

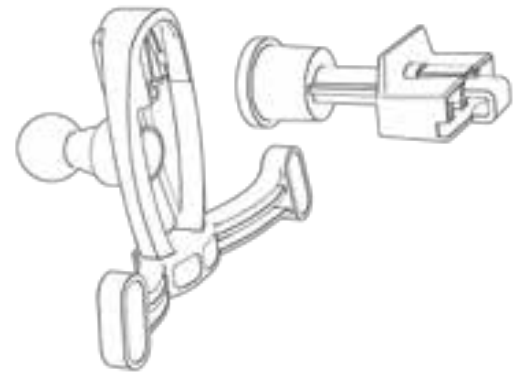

*Note: Not compatible with some circular vent styles.

USING THE CD-DVD SLOT MOUNT

1. Attach the smartphone bracket holder to the CD-DVD Slot Mount by securing it to the ball joint.
2. Insert the CD-DVD Slot mount into your vehicle's CD player slot. All tabs should be flat and aligned.
3. Turn the screw clockwise until the unit does not move. This raises the center tab and locks the mount into place.
Note: Not compatible with all CD-DVD slots.

SPECIFICATIONS

Designed to hold phones up to 3.5" - 6.3".

SAFETY PRECAUTIONS

- Do not attempt to pierce, strike, or apply strong pressure with sharp or heavy objects. Strong impact or shocks could cause irreversible damage to the unit.
- Do not attempt to disassemble or modify the OneGrip in any way.
- Discontinue use if the OneGrip appears malfunctioning in any way.

If you have any other questions or issues with product use and/or care, please contact tzumi Technical Support at: support@tzumi.com or 1-855-GO-TZUMI.

life just got better.
tzumi®



izumi® Distributed by tzumi Inc NY, NY, 10016. ©Copyright 2021. All Rights Reserved. Made In China. All pictures shown are for illustration purpose only. Actual products may vary due to product enhancement. Other trademarks and trade names on this package are those of their respective owners. Subject to change without prior notice.