


Beringer™ Pull-Down Kitchen Faucet

- F-529-7BRGC Finish(C) ☐
- F-529-7BRGGS Finish(GS) ☐
- F-529-7BRGSDB Finish(SDB) ☐



Specifications

Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer (Spray and Stream)
- 360° Rotating High Arc Swivel Spout
- MagnePfit™ Sprayhead Docking
- Spot Defense™ Finish Resists Spots and Fingerprints
- Optional SoloTilt™ Soap Pump Available, Order KSD-KEM* Separately
- TopPfit™ Top Mount Installation
- TopPfit™ Quick Install Tool
- 9" Pull-Down Hose Length
- Braided Nylon Hose
- 32" Nylon Flex-Lines with 3/8" Connection
- Forward Handle Operation
- TiteSeal™ Technology
- Pfaster Connect™ Adapter Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant – ANSI A117.1 (Lever Handle Only)



Dimensions

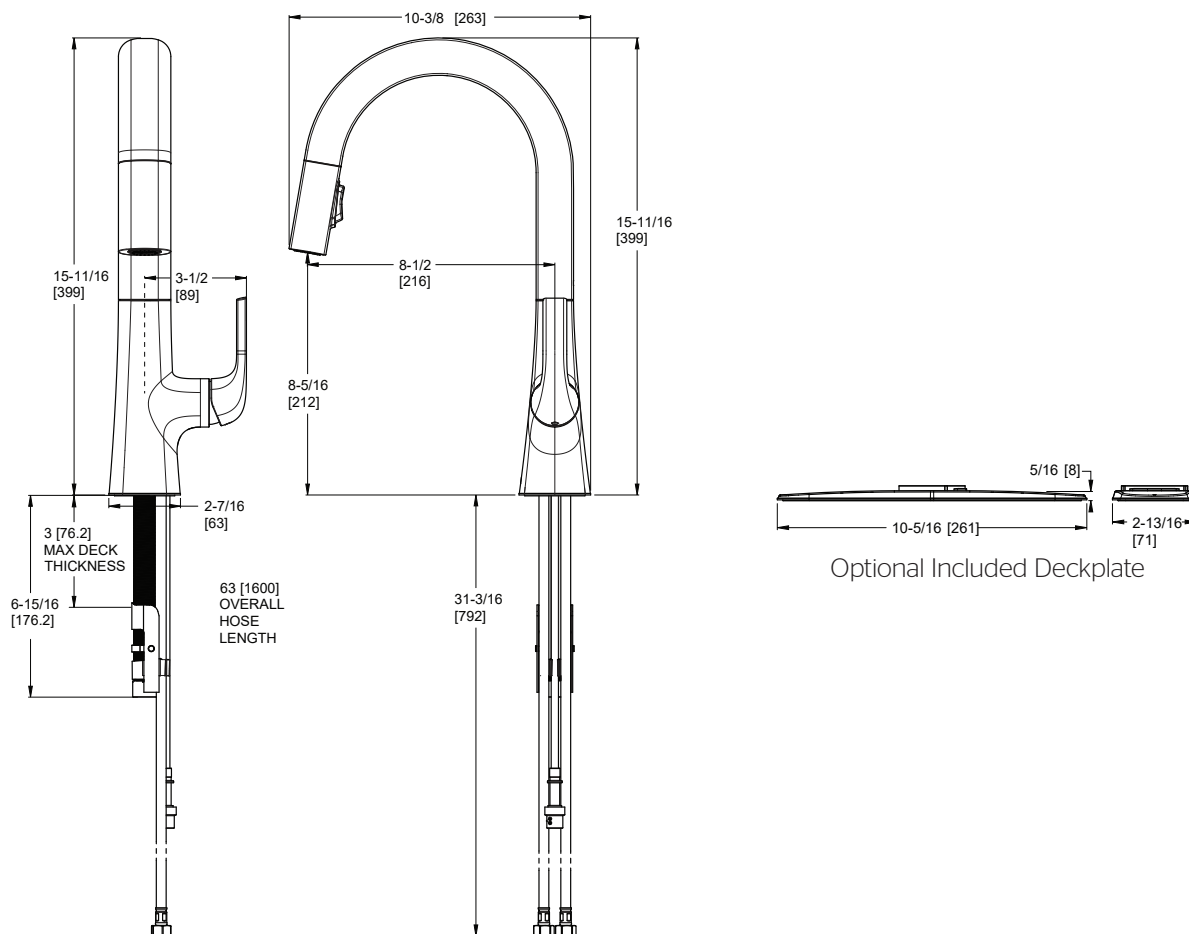

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings