

ELKAY
sinks + faucets

Installation Instructions
LKD35 / RVD35 Series
LKS35 / RVS35 Series


LKD35 / RVD35 - SINK FLANGE WITH REMOVABLE STRAINER FOR GARBAGE DISPOSALS



1. MAKE SURE DISPOSER IS INSTALLED PROPERLY TO SINK AND CLAMP IS SECURE
2. CLEAN INSIDE OF METAL COLLAR (SUPPLIED WITH GARBAGE DISPOSER)




3. LUBRICATE FLANGE GASKET WITH WATER AND PUSH FLANGE SLOWLY INTO THE METAL COLLAR. PRESS FIRMLY UNTIL IN PLACE.




4. LUBRICATE GASKET ON STRAINER WITH WATER AND PUSH SLOWLY INTO THE FLANGE

WILL NOT FIT ANY GARBAGE DISPOSAL THAT ACCOMMODATES A 3-1/4"(83mm) DIAMETER FLANGE (I.E. GE, SINKMASTER, WHIRLAWAY MODELS WITH THE EZ MOUNT FLANGE). WILL NOT FIT BATCH FEED GARBAGE DISPOSALS.


LKS35 / RVS35 - DRAIN WITH REMOVABLE STRAINER

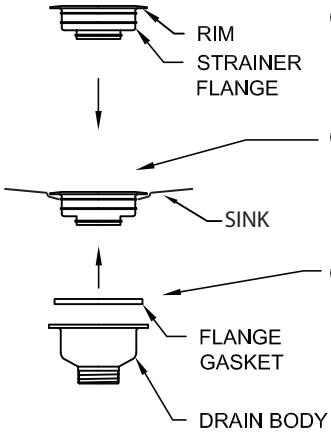

1. APPLY A SMALL AMOUNT OF NEUTRAL CURE* SILICONE CAULK / ADHESIVE UNDER THE RIM OF STRAINER FLANGE
2. PLACE INTO SINK
3. LUBRICATE FLANGE GASKET WITH WATER, PLACE INTO LIP OF DRAIN BODY AND POSITION DRAIN BODY ON THE SINK BOTTOM



4. LINE UP RIBS IN DRAIN BODY AND STRAINER FLANGE THEN SCREW IN FERRULE. **CAUTION:** HAND TIGHTEN THEN 1/4 TURN WITH SMALL SCREW DRIVER. DO NOT OVER TIGHTEN. REMOVE EXCESS CAULK / ADHESIVE

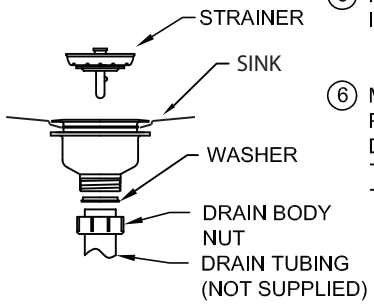

5. PUSH STRAINER INTO FERRULE IN DRAIN BODY
6. MAKE SURE WASHER IS IN POSITION, SLIDE NUT ON 1 1/2" DRAIN TUBING AND HAND TIGHTEN THE DRAIN BODY NUT. TEST FOR LEAKS.

*SOME EXAMPLES OF NEUTRAL CURE SEALANTS ARE AS FOLLOWS:

-GE SILICONE II PRODUCTS
-POLYSEAMSEAL EVERBRIGHT ACTIVE SILICONE SEALANT
-WHITE LIGHTNING SILICONE ULTRA KITCHEN AND BATH
-DAP SILICONE PRODUCTS

ELKAY
2222 Camden Court
Oak Brook, IL 60523

© 2011 Elkay
Printed in Scotland
elkayusa.com

(Rev B 10/11) 74180623