
FLANGE
Brida

INSTALLATION:

1. Turn off water supply.
2. Remove the index button and retaining screw then remove the handle.
3. Unthread and remove the old flange and nipple.
4. Identify the correct nipple by threading the nipple onto the stem. Start with nipple A and try both ends.
5. Remove the nipple once the correct nipple has been identified.
6. Cut the nipple at the first notch from the opposite end of the thread that threads onto the stem.
7. Identify the correct configuration of the flange based on the length of the stem.
8. Install new nipple and flange.
9. Reinstall the handle.
10. Turn on water supply and check for leaks.

Tools needed for installation : screwdriver

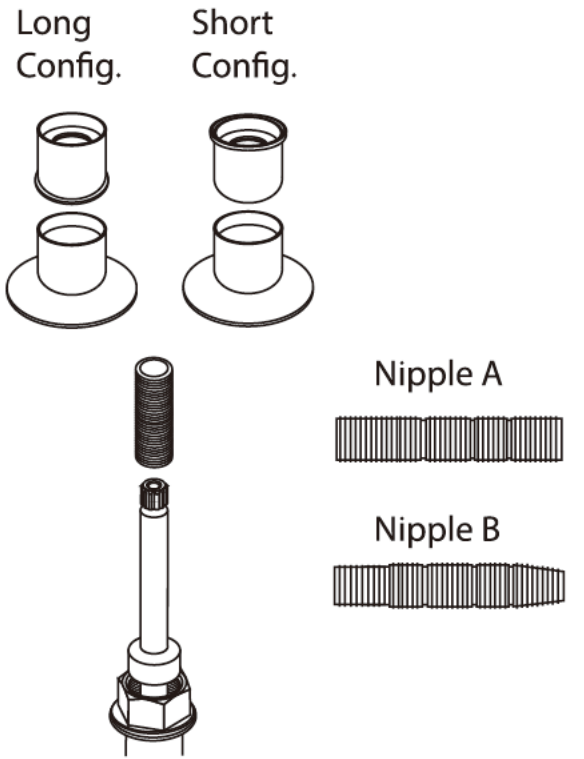

WARNING: Cancer and Reproductive Harm - *www.P65Warnings.ca.gov.*