Aquifer®+ | K-29638

Two-stage water filtration system

Features

- Two-stage filtration system reduces contaminants such as bacteria, virus, lead, mercury, chlorine, chloramine, select pharmaceuticals, and more
- Reduces over 95% of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) in drinking water
- Two-cartridge system includes coconut shell-based carbon filter and hollow fiber membrane filter
- Hollow fiber membrane technology reduces bacteria and virus in the water
- 0.85 gpm maximum flow rate at 60 psi
- Provides the equivalent of over 2,900 standard 16.9-oz bottles of water
- Filter head automatically turns off water supply when cartridge is removed
- Includes K-77687 carbon block VOC and K-29639 hollow fiber membrane single replacement filter cartridges
- Recommended for use with KOHLER® beverage faucets



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:5 - US-CA

THE BOLD LOOK OF KOHLER®

Codes/Standards

CSA B483.1
NSF Protocol P231
NSF/ANSI 42
NSF Protocol P473
NSF/ANSI 401
NSF/ANSI 53
NSF/ANSI 42|NSF/ANSI 53|NSF/ANSI 401|NSF Protocol P231|NSF Protocol P473

Technical Information

All product dimensions are nominal.

Flow Rate

Faucet Flow Rate:	0.85 gpm (3.2 l/min)

Material

- High-impact plastic construction

Recommended Products/Accessories

K-29651 Replacement filter cartridge two-pack with hollow fiber membrane and carbon block VOC

K-26369 Beverage faucet


Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:5 - US-CA

THE BOLD LOOK OF KOHLER.

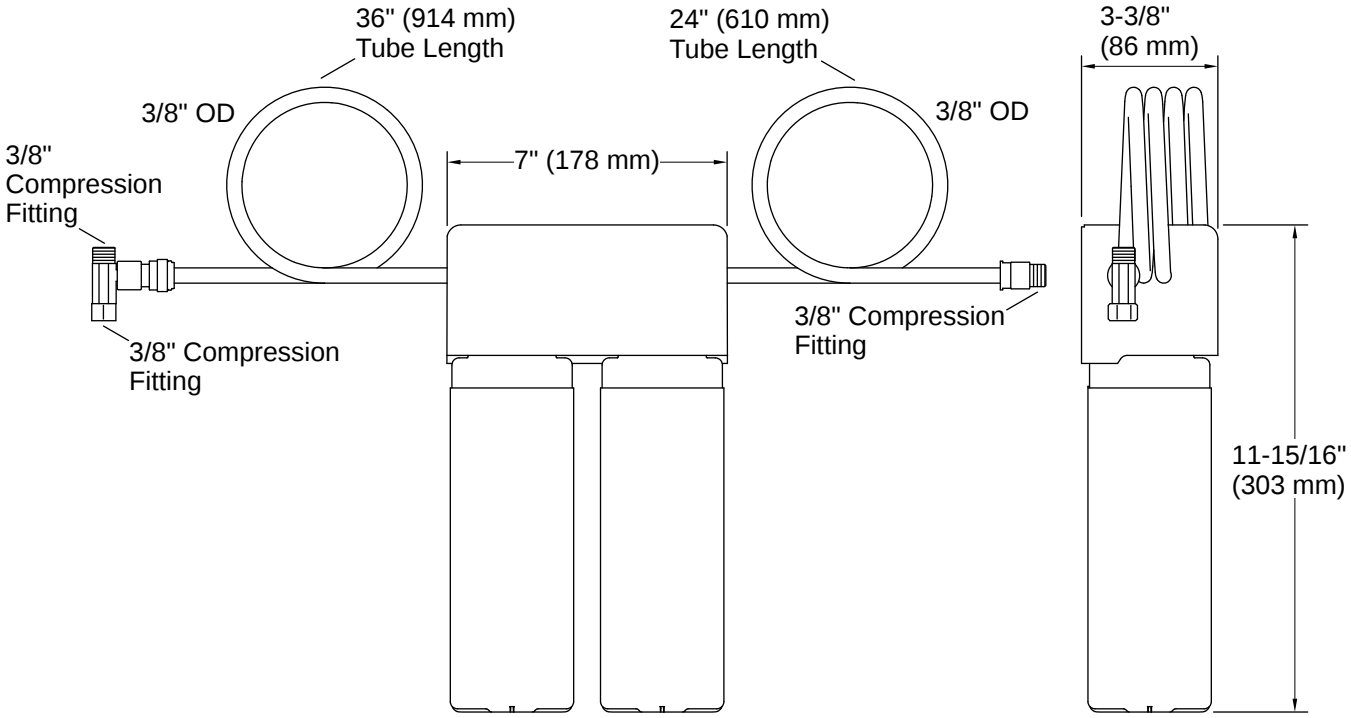

Installation

- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement
- For cold water use only

Installation Notes

Install this product according to the installation instructions.

To prevent the risk of property damage, protect from freezing.
For cold water use only.
To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.
Application guideline/water supply parameters: Water Pressure: 40-120 psi (276-827 kPa) Water Temperature: 33-100°F (0.5-37.8°C) Capacity: 389 gal (1,472 L)

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:5 - US-CA

THE BOLD LOOK OF KOHLER