


INSTALLATION INSTRUCTIONS

Included In the Package:

1. Bathroom Faucet
2. Deck Plate (Vessel sink bathroom faucets do not contain deck plates)
3. Pop-Up Drain
4. "O"-Ring
5. Rubber Gasket
6. Metal Gasket
7. Fixing Screw
8. Fixing Nut
9. Wrench


Before Installation:

- Turn off the water supply valves. Clean the mounting area of the sink.
- Recommended width of mounting area is between 15cm-31cm (6"-12") measured between centers of outside mount holes as shown in the diagram.
- Diameter of mount holes must be between 32mm-35mm (1.26"-1.38") as shown in the diagram.
- Max countertop thickness is 35mm (1.38")
- Water pressure Min 0.05MPa (7 psi) / Max 0.75MPa (109 psi)
- Water temp Min $\geq 20^{\circ}\text{C}$ (68°F) / Max $\leq 85^{\circ}\text{C}$ (185°F)

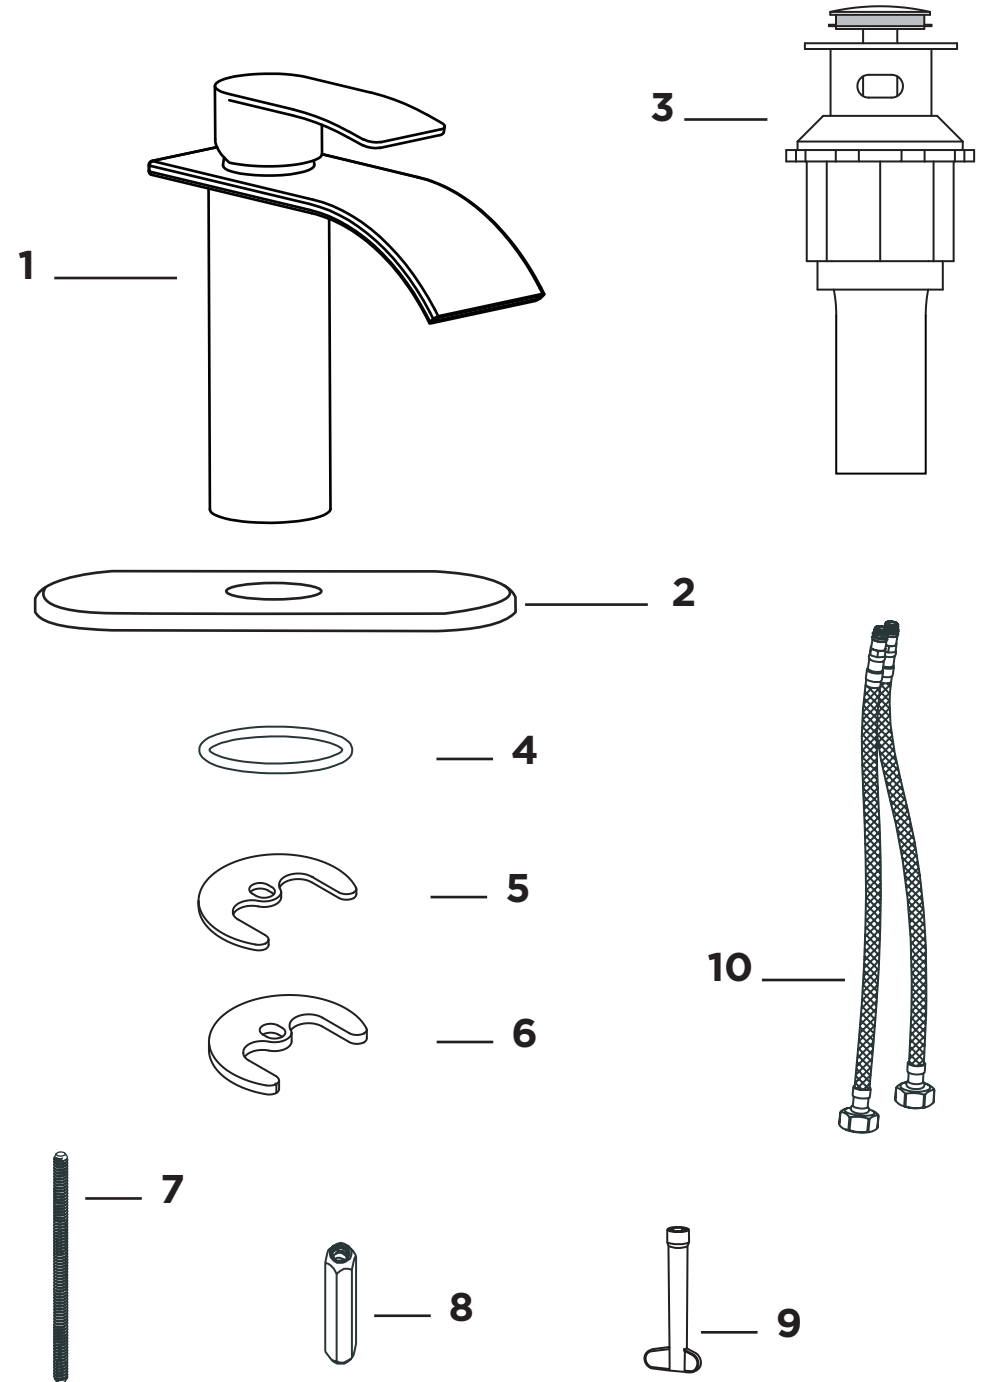


Installation Steps:

- 1.** Place the O-ring at the bottom of the faucet.

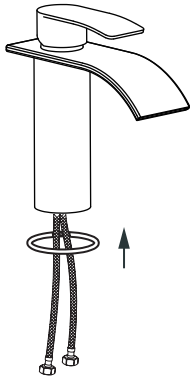


- 2.** Tighten the fixing screw to the faucet body.

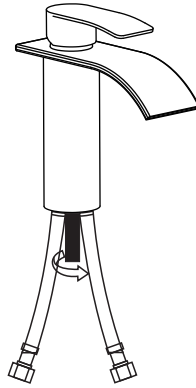


- 3.** Run the deck plate through the water supply hoses and place it at the bottom of the faucet body.

Note:

- The deck plate installation is optional.
- Vessel Sink Bathroom Faucets does not need to install the deck plate.




- 4.** Pass the water supply hoses of the faucet through the sink hole and place the faucet standing on the sink.

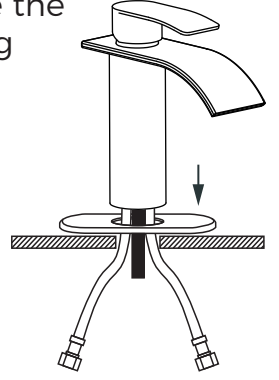


- 5.** Put the rubber gasket into the fixed screw.

- 6.** Put the metal gasket into the fixed screw.


- 7.** Screw the fixing nut to the fixed screw and tighten it with a wrench.

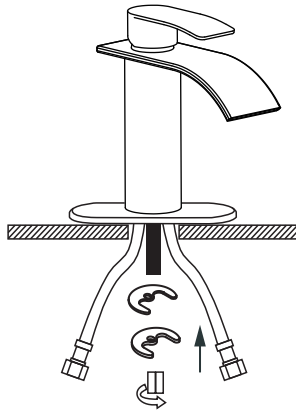


- 8. Notice:** Open the water valve at this time, to drain out the sewage in the water pipe for 15 seconds and then close it.

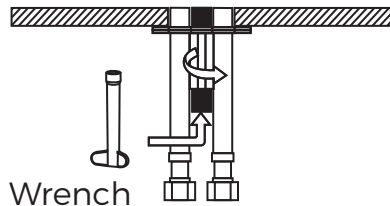

- 9.** Screw the water inlet hose nut onto the water valve and tighten it with a wrench. Finally, open the water valve and enjoy your waterfall.



- 11.** Install the pop-up sink drain stopper.



Maintenance:

- Always operate the faucet gently to ensure years of use.
- To maintain the finish, always blot dry any water on the faucet surface. Clean with a damp non-abrasive sponge and wipe dry with a clean soft cloth.
- Although the finish is very durable, certain cleaners can damage it. DO NOT use detergent powder, polishing powder, a nylon brush, or anything that may scratch the finish.
- DO NOT use acidic cleaners on the faucet.
- If air temperature falls below freezing (0°C / 32°F), run the faucet to prevent freezing.
- Shut off water supply valve when not in use for long periods.
- We reserve the right to make revisions to product design without notice.