WAC LIGHTING

Lotos 4" & 6"

Round

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ R4ERAR	❍ W 45°	❍ 9CS 2700K/3000K/3500K/4000K/5000K - 90	690 800	925 1020	❍ BK Black ❍ WT White

Example: **R4ERAR-W9CS-WT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can beinstalled easily as a remodel or new construction with an optional frame-in kit sold separately. Lotos is available in a downlight version for general ambient lighting and anadjustable version with a gimbal that pivots 360 degrees on a hinge. Now available with 5-CCT options.

FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120 -277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL,Title 24 JA8 Compliant,Energy Star 2.0
	Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



Black White

LINE DRAWING:

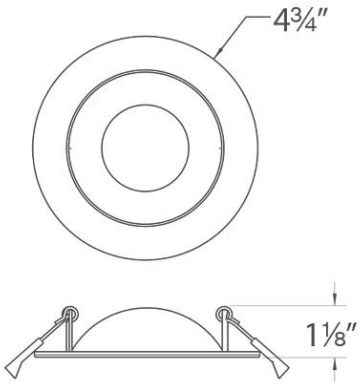

R4ERAR

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. August 2024

WAC LIGHTING

Lotos 4" & 6"

Round

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ R6ERAR	❍ W 45°	❍ 9CS 2700K/3000K/3500K/4000K/5000K - 90	1290 1340	1920 1896	❍ BK Black ❍ WT White

Example: **R6ERAR-W9CS-WT**

For custom requests please contact customs@waclighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can beinstalled easily as a remodel or new construction with an optional frame-in kit sold separately. Lotos is available in a downlight version for general ambient lighting and anadjustable version with a gimbal that pivots 360 degrees on a hinge. Now available with 5-CCT options.

FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120 -277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL,Title 24 JA8 Compliant,Energy Star 2.0
	Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



Black White

LINE DRAWING:

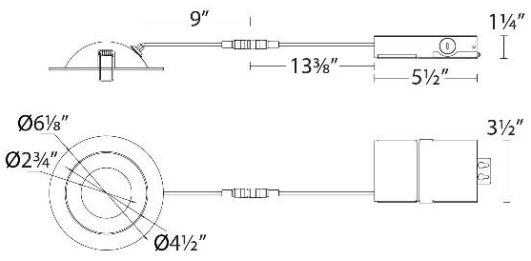

R6ERAR-W930-WT

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. August 2024