# Compass® | K-2298

13-1/4" round drop-in/undermount bathroom sink, no overflow

## Features

- Petite round design
- No faucet holes; requires wall- or counter-mount faucet



## Available Colors/Finishes

*Color tiles intended for reference only.*

0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 10:7 - US-CA

## Codes/Standards

***ADA, CSA B651 compliant when installed to the specific requirements of these regulations.***

ADA CSA B651

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

## Technical Information

| | |
|---|---|
| Drain Hole Diameter: | 1-3/4" (44 mm) |
| Basin Configuration: | Single Bowl |
| Basin Length: | 10-5/8" (270 mm) |
| Basin Width: | 10-5/8" (270 mm) |
| Basin Depth: | 5" (127 mm) |

## Material

- Vitreous china

## Recommended Products/Accessories

K-23726 Drain treatment

K-9018 Adjustable P-trap with long tubing outlet, 1-1/4" x 1-1/4"

K-23725 Cast iron cleaner

## Warranty


***See website for detailed warranty information.***


KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 10:7 - US-CA

THE BOLD LOOK OF KOHLER.

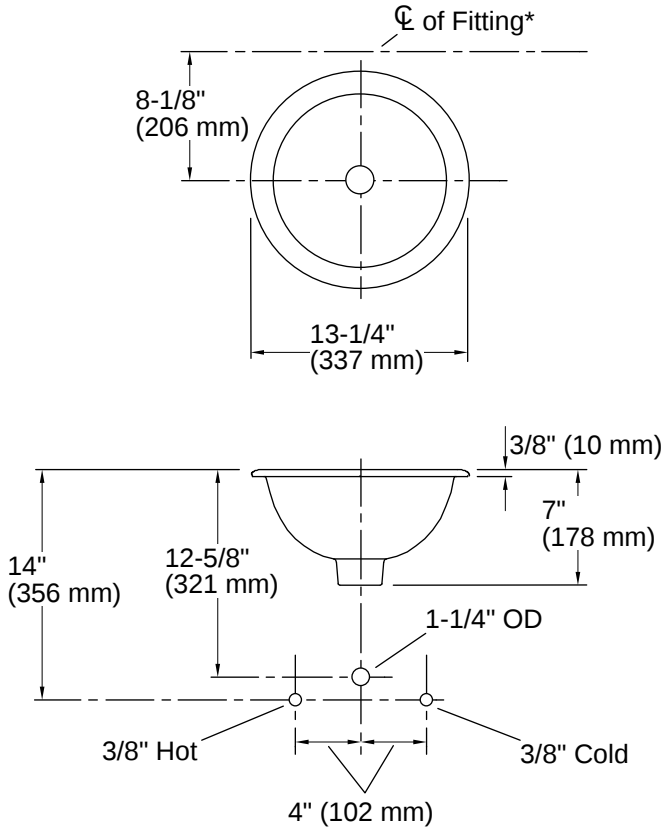

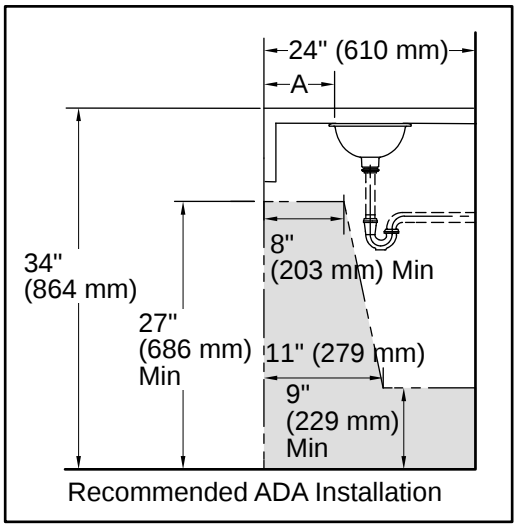
| | A |
|---|---|
| Drop-in | 4-3/8" (137 mm) |
| Under-mount (shown) | 4-3/8" (137 mm) |

## Installation

- Drop-in or undermount

## Installation Notes

***Install this product according to the installation instructions.***

Spout must be a minimum of 4-1/2" (114 mm) long for adequate clearance into bathroom sink.
Supplied basin clamp assembly for under-mount installation requires 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.
Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.
ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 10:7 - US-CA

THE BOLD LOOK OF KOHLER.